


JOB NAME:	
CONTRACTOR:	DATE:



## CAMO® COUNTERSUNK DECK SCREW

**Size Range:** #8, #10  
**Head Type:** Countersunk Trim Head  
**Drive Type:** T25 Star  
**Point Type:** Sharp, Type-17 Cut

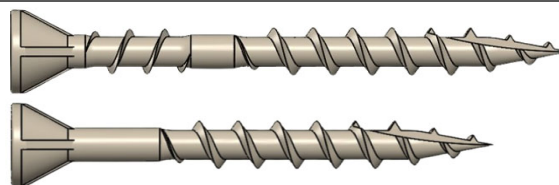

**APPLICATION** Secures decking to wood substructure  
 For indoor or outdoor applications

1-1/4 DOES NOT HAVE  
 REVERSED THREADS UNDER THE HEAD

**FEATURES** Compatible with chemically treated lumber  
 Reverse upper thread pulls the board tight to the joist  
 Underhead nibs work together with the reverse upper thread for a clean finish at entry point


**COATING** Proprietary ProTech coating is designed for use with chemically treated lumber

**INSTALLATION** Not recommended for use with impact drivers


**CAUTION** Not to be used for structural applications  
 Not designed for use in aluminum, vinyl, stone, or rubber deck board products  
 Not designed for use with steel or other metal substructure components  
 No warranty is provided when the product is used in connection with incorrect applications  
 Read manufacturers' installation instructions for deck board products



### DIMENSIONS

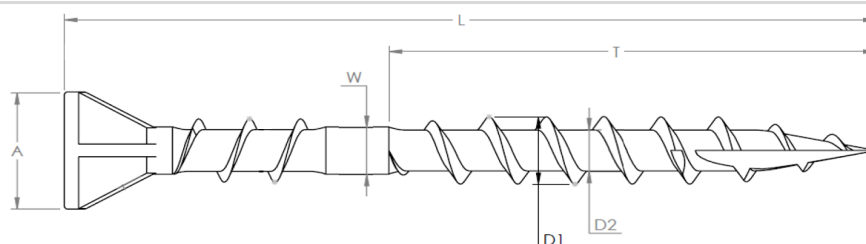

	Head Dia.	Major Thread Dia.	Minor Thread Dia.	Overall Length	Shank Dia.	Thread Length
	A	D1	D2	L	W	T
#8 x 1-1/4 in	Ø 0.295 in (Ø 7.5 mm)	Ø 0.168 in (Ø 4.29 mm)	Ø 0.107 in (Ø 2.72 mm)	1.25 in (31.75 mm)	Ø 0.119 in (Ø 3.02 mm)	0.75 in (19.1 mm)
#8 x 1-5/8 in	Ø 0.295 in (Ø 7.5 mm)	Ø 0.168 in (Ø 4.29 mm)	Ø 0.107 in (Ø 2.72 mm)	1.625 in (41.28 mm)	Ø 0.119 in (Ø 3.02 mm)	0.75 in (19.1 mm)
#8 x 2 in	Ø 0.295 in (Ø 7.5 mm)	Ø 0.168 in (Ø 4.29 mm)	Ø 0.107 in (Ø 2.72 mm)	2 in (50.8 mm)	Ø 0.119 in (Ø 3.02 mm)	1 in (25.4 mm)
#10 x 2-1/2 in	Ø 0.339 in (Ø 8.6 mm)	Ø 0.194 in (Ø 4.94 mm)	Ø 0.138 in (Ø 3.51 mm)	2.5 in (63.5 mm)	Ø 0.149 in (Ø 3.78 mm)	1.30 in (33 mm)
#10 x 3 in	Ø 0.339 in (Ø 8.6 mm)	Ø 0.194 in (Ø 4.94 mm)	Ø 0.138 in (Ø 3.51 mm)	3 in (76.2 mm)	Ø 0.149 in (Ø 3.78 mm)	1.42 in (36 mm)
#10 x 3-1/2 in	Ø 0.339 in (Ø 8.6 mm)	Ø 0.194 in (Ø 4.94 mm)	Ø 0.138 in (Ø 3.51 mm)	3.5 in (88.9 mm)	Ø 0.149 in (Ø 3.78 mm)	1.89 in (48 mm)
#10 x 4 in	Ø 0.339 in (Ø 8.6 mm)	Ø 0.194 in (Ø 4.94 mm)	Ø 0.138 in (Ø 3.51 mm)	4 in (101.6 mm)	Ø 0.149 in (Ø 3.78 mm)	2.40 in (61 mm)



## CAMO® COUNTERSUNK DECK SCREW

AVAILABLE PRODUCT	Size x Length	Tan	Box Count QTY	Master Pack Qty
	#8 x 1-1/4 in	0376070	100 ct	12
		0376074	350 ct	4
		0376079	1750 ct	1
	#8 x 1-5/8 in	0376100	100 ct	12
		0376104	350 ct	4
		0376109	1750 ct	1
	#8 x 2 in	0376130	100 ct	12
		0376134	350 ct	4
		0376139	1750 ct	1
	#10 x 2-1/2 in	0376150	100 ct	12
		0376154	350 ct	4
		0376159	1750 ct	1
	#10 x 3 in	0376170	100 ct	12
		0376174	350 ct	4
		0376175	1750 ct	1
	#10 x 3-1/2 in	0376190	50 ct	12
		0376194	250 ct	4
		0376199	1350 ct	1
	#10 x 4 in	0376200	50 ct	12
		0376204	250 ct	4
		0376209	1350 ct	1

(1) T25 Bit Included in Every 100 ct & 350 ct Box • (2) T25 Bits Included in Every 1750 ct Box