

THE BETTER WAY TO BUILD A DECK.

FASTENING SYSTEMS



CLIPDRIVE

STAND-UP DECK CLIP FASTENING SYSTEM

The Better Way to Fasten CAMO Universal Deck Clips.

PAGES 6-7

FOR USE WITH CAMO UNIVERSAL DECK CLIPS





NEVER-MISS GUIDE

DECK CLIP FASTENING SYSTEM

Included in 450 ct and 900 ct pails of CAMO Universal Deck Clips.

PAGES 8-9

FOR USE WITH CAMO UNIVERSAL DECK CLIPS






DRIVE

STAND-UP 3-IN-1 FASTENING SYSTEM

Save time with the award-winning CAMO DRIVE® tool.

PAGES 10-11

FOR USE WITH CAMO COLLATED EDGE + FACE SCREWS OR CAMO UNIVERSAL DECK CLIPS



THE BETTER FLOATING

FOUNDATION

PAGES 22-23



MARKSMAN

HIDDEN EDGE SCREW FASTENING SYSTEM

Achieve a fastener-free surface on square edge decking.

PAGES 16-17

FOR USE WITH CAMO EDGE SCREWS



ACCESSORIES

DECK TAPE

SELF-ADHESIVE LINED BUTYL TAPE





ACCESSORIES



SYSTEM FASTENERS

For exclusive use with CAMO® systems



CAMO EDGE SCREWS









CAMO COLLATED EDGE + FACE SCREWS

CAMO UNIVERSAL DECK CLIPS



STARTER CLIPS







EXTERIOR FASTENERS

For Deck, Composite, Trim, or Structural connections.

BUGLEHEAD DECK





COMPOSITE









How many

fasteners does my deck project need?

Scan here for the **CAMO** Fastener Calculator.

CODE-COMPLIANT STRUCTURAL SCREWS

















STAINLESS STEEL












316 RING SHANK DECK NAILS (COLLATED AVAILABLE)








WEDGE 316SS



CONTENTS

DRIVE SYSTEMS	
CLIPDRIVE	
UNIVERSAL DECK CLIPS	
DRIVE	
COLLATED SCREWS	
DRIVE SYSTEM ACCESSORIES	
MARKSMAN SYSTEM	
MARKSMAN TOOLS	
EDGE SCREWS	
MARKSMAN ACCESSORIES	2
BLOCK	2
DECK TAPE	2
LEVER	2
EXTERIOR FASTENERS	2
DECK	2
COMPOSITE	
TRIM	
STRUCTURAL	
EXTERIOR ACCESSORIES	
STAINLESS STEEL FASTENERS	5
UNIVERSAL DECK CLIPS	
DECK SCREWS	
COMPOSITE SCREWS	5
EDGE SCREWS	5
TRIM SCREWS	
BITS	6
HAND DRIVE NAILS	
COLLATED NAILS	
COATINGS INFORMATION	6
FASTENER & TOOL SELECTOR	6

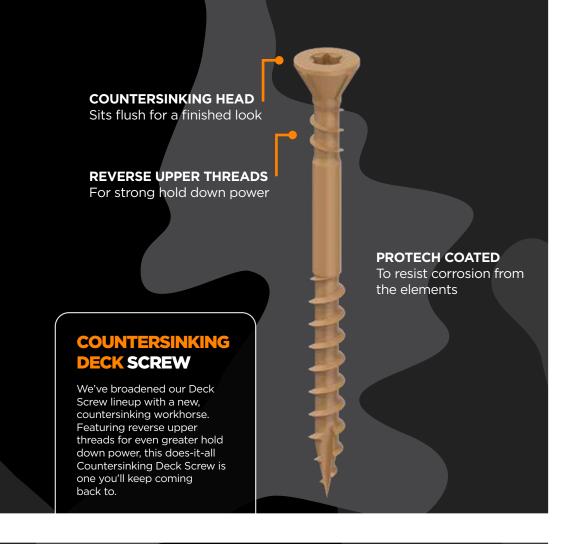







CAMO NEW FOR 2025

CAMO's spirit of innovation runs through everything we do. Not content with "good enough," we invent tools and fasteners to help builders get the job done easier, faster, better - for the pro deck builders and remodelers alike. We look to those in the field and learn from real-world experiences to drive our innovation and new products pipeline, which is why we're introducing for 2025 a new Countersinking Deck Screw that is sure to become a staple of for every CAMO user for decking projects and beyond. And a new 6" High Vis Truss Screw has been added to the lineup to keep the work moving, making jobsite inspections faster and simpler. Look for new black 4.5" Truss screws, black Trim Screws, and black Composite Screws in the line-up growing application support and expanding the available color match options.

Whether you're building a deck, or taking on home builds, or renovations, CAMO has the tools and fasteners you need to get it done right.

CAMOFASTENERS.COM

D ⊡ f

CAMO




CLIPDRIVE

STAND UP FASTENING TOOL FOR CAMO® UNIVERSAL DECK CLIPS

The Better Way to Fasten CAMO Universal Deck Clips.

Stand tall, target screws easily, and drive clips up to 5X faster with CAMO ClipDRIVE, the contractor-grade tool designed to give you the best experience fastening grooved decking.

STAND-UP DECK CLIP FASTENING SYSTEM





ClipDRIVE™

- Install grooved decking up to 5X faster
- For use with CAMO Universal Deck Clips on leading grooved deck boards
- Attaches to your drill, features an adjustable handle, and has a weighted nose for easy screw targeting
- Ergonomically designed to be easy on the body and reduce fatigue on the job
- CAMO Universal Deck Clips and the ClipDRIVE are backed by a CAMO Warranty



SKU#	DESCRIPTION	QTY	CT./MASTER
0345065	ClipDRIVE	1	1

FASTEN WITH THE ClipDRIVE


CLIP





BUILD YOUR DECK UP TO 5X FASTER USING CAMO LEVER, CLIPS AND ClipDRIVE TOGETHER.

(p.26)








UNIVERSAL DECK CLIPS

CAMO deck clips make installing grooved decking on wood or metal joists easy for everyone.

These hidden deck clips are designed and warranted for use with leading grooved deck boards and result in a beautiful fastener-free surface that you can install in half the time of other hidden fasteners. Fasten EDGE*, WEDGECLIP $^{\text{TM}}$, and WEDGEMETAL* Clips by hand with the NEVER-MISS* Guide or standing up with ClipDRIVE $^{\text{TM}}$ and DRIVE.





STARTER

- Secure the first and last board to achieve a completely fastener-free deck surface on wood joists
- Designed for use with leading grooved deck boards
- Screw tip bites into joist quickly
- Versatile clip can also be used as an L-bracket
- 304 stainless steel clip and 304 stainless steel screw



SKU#	DESCRIPTION	COVERAGE	QTY	DRIVER BIT	CT./MASTER
0344087	STARTER Clip - For Wood Joists	30 lineal ft (9 m)	25		6



EDGE

- 90° deck patterns on wood joists
- One-pass fasteners—clip sits in place on the joist until you're ready to fasten
- Clip creates 3/16 in (4.7 mm) spacing
- · Gusset holds boards down
- Fasten with included* NEVER-MISS* Guide or while standing up with the CAMO ClipDRIVE* or DRIVE
- 305 stainless gusset, 305 stainless screw, nylon plastic spacer body



*Included in 450 ct and 900 ct pails

SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344354	EDGE Clip - 90° Deck Pattern on Wood Joists	90	50 sq ft (4.64 m²)	1 - T-15	4
0344359		450	250 sq ft (23.2 m ²)	2 - T-15	1
0344356		900	500 sq ft (46.4 m²)	2 - T-15	1



WEDGECLIP[™]


- Any deck pattern on wood joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- · Gusset holds boards down
- 316 stainless gusset, 316 stainless screw, nylon plastic spacer body
- Fasten with included *NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.




*Included in 450 ct and 900 ct pails

SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344654S	WEDGE Clip - Any Deck Pattern on Wood Joists	90	50 sq ft (4.64 m²)	1 - T-15	8
0344659S		450	250 sq ft (23.22 m²)	2 - T-15	1
0344656S		900	500 sq ft (46.45 m²)	2 - T-15	1

WEDGEMETAL®






- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- 305 stainless gusset, 410 stainless drill point screw, nylon plastic spacer body
- Fasten with included *NEVER-MISS* Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.



*Included in 450 ct and 900 ct pails

SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344674	WEDGEMETAL Clip - Any Deck Pattern on Metal Joists	90	50 sq ft (4.64 m²)	1 - T-15	8
0344679		450	250 sq ft (23.22 m²)	2 - T-15	1
0344676		900	500 sq ft (46.4 m2)	2 - T-15	1



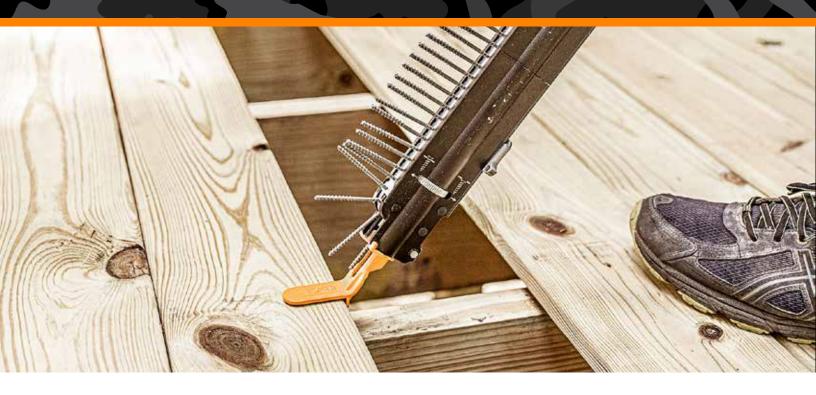


CAMO DRIVE®

STAND UP FASTENING TOOL FOR CAMO COLLATED EDGE SCREWS, FACE SCREWS AND DECK CLIPS

Stand up, save your back and knees, and save your time with the award-winning CAMO DRIVE tool.

Fasten square and grooved deck boards with the CAMO DRIVE tool, featuring three interchangeable nose pieces to install Collated Edge and Face Screws and CAMO Universal Deck Clips.

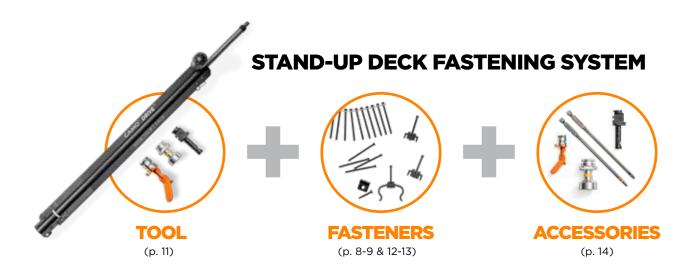




CAMO DRIVE®

- · Attaches to your drill
- Use with CAMO Collated Edge Screws,
 Collated Face Screws, and CAMO Universal Deck Clips
- Fasten square* pressure treated, KDAT, cedar, redwood, composite, PVC, and grooved deck boards
- Easy to use, featuring a reversible handle and quick-change nose pieces
- Stand-up fastening allows for fast installations that are easy on the body



SKU#	DESCRIPTION	QTY	CT./MASTER
0345060	DRIVE	1	1

THREE WAYS TO FASTEN WITH DRIVE

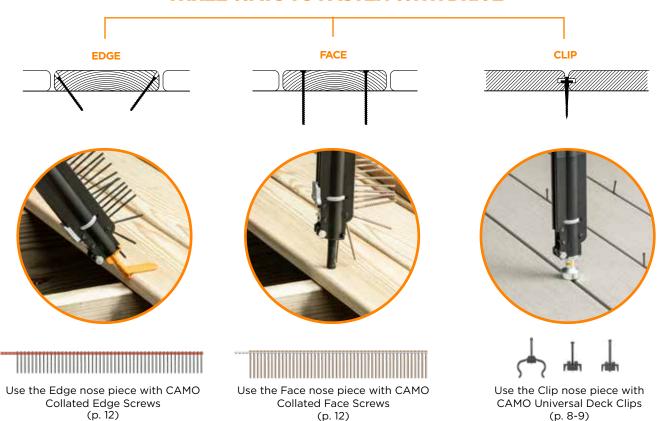

^{*}For most square decking installs, we recommend using secondary spacers to allow for expansion, contraction, and drainage.






COLLATED SCREWS

CAMO Collated screws are exclusively designed for use with the DRIVE tool.

Each fastener was intentionally created and collated for peak performance in its given application. Collated screws are available in 1000 ct. quantities, which cover 285 sq ft (26.48 m^2) and come with their corresponding driver bits: T-15 for Edge Screws and T-20 for Face Screws.

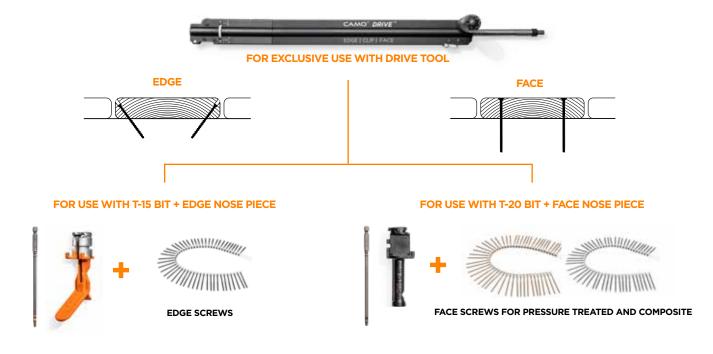



COLLATED EDGE SCREWS (WOOD, NON-CAPPED COMPOSITE AND PVC)

- For use with DRIVE and Edge nose piece (orange)
- 2-3/8 in (60.3 mm) screw secures 1-1-1/2 in (25.4-38.1 mm) thick pressure treated, cedar, redwood, uncapped composite, and PVC deck boards
- Rake tip augers material out reducing splitting and cracking, trimhead reduces visibility
- T-15 Star Drive limits cam-outs



SKU#	DESCRIPTION	COATING/ALLOY	SIZE	QTY	DRIVER BIT	CT/MASTER
0395010	Collated Edge Screws	PROTECH®	2-3/8 in (60.3 mm)	1000	2 - T-15	1
0395020S	for DRIVE	316 Stainless Steel	2-3/8 in (60.3 mm)	1000	2 - T-15	1



COLLATED FACE SCREWS (PRESSURE TREATED)

- nose piece (black)
- 3 in (76.2 mm) screw secures pressure treated boards up to 1-1/2 in (38.1 mm) thick
- For use with DRIVE and Face Rake tip augers material out, reducing splitting, and buglehead draws the board tight
 - T-20 Star Drive limits cam-outs



SKU#	DESCRIPTION	COLOR	SIZE	QTY	DRIVER BIT	CT/MASTER
0395040	Collated Wood Face	Green	3 in x #10 (76.2 mm)	1000	2 - T-20	1
0395042	Screws for	Tan	3 in x #10 (76.2 mm)	1000	2 - T-20	1
0395047	DRIVE - PROTECH®	Red	3 in x #10 (76.2 mm)	1000	2 - T-20	1



COLLATED FACE SCREWS (COMPOSITE, CAPPED-COMPOSITE AND PVC)

- nose piece (black)
- 2-1/2 in (63.5 mm) screw secures 1 in (25.4 mm) thick composite and PVC deck boards
- For use with DRIVE and Face Slash point drives quickly, cutting lead edge creates a flush finish
 - T-20 Star Drive limits cam-outs





SKU#	DESCRIPTION	COLOR		SIZE	QTY	DRIVER BIT	CT/MASTER
0395050		Brown	0	2-½ in x #10 (63.5 mm)	1000	2 - T-20	1
0395060	Collated Composite Face Screws for DRIVE - PROTECH®	Gray	0	2-½ in x #10 (63.5 mm)	1000	2 - T-20	1
0395070	DINIVE TROTEGIT	Tan	0	2-½ in x #10 (63.5 mm)	1000	2 - T-20	1
0395080	Collated Composite Face Screws for DRIVE- 305 Stainless Steel	Bright		2-½ in x #10 (63.5 mm)	1000	2 - T-20	1



DRIVE SYSTEM ACCESSORIES

Driver bits are engineered specifically for use with the CAMO DRIVE® and ClipDRIVE™ tools. The bits engage quickly and easily with the screw heads with reduced cam-outs, and are color-coded with a band for quick identification—orange and yellow for Edge and Clip fastening, black for Face fastening.

T-15 BIT



- For use with CAMO DRIVE for Edge or Clip fastening and the CAMO ClipDRIVE
- 6.25 in (160 mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0395715	T-15 Bit Replacement	2/pk	4

T-20 BIT



- For use with CAMO DRIVE for Face fastening
- 6.25 in (160 mm) long
- T-20 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER	
0395720	T-20 Bit Replacement	2/pk	4	

NOSE PIECES




- Replacement nose pieces for use with CAMO DRIVE
- Edge (orange) for fastening Collated Edge Screws
- Clip (yellow-banded silver) for fastening Universal Deck Clips
- Face (black) for fastening Collated Composite and Wood Face Screws



SKU#	DESCRIPTION	QTY
0395801	Replacement Edge Nose Piece	1
0395805	Replacement Clip Nose Piece	1
0395803	Replacement Face Nose Piece	1






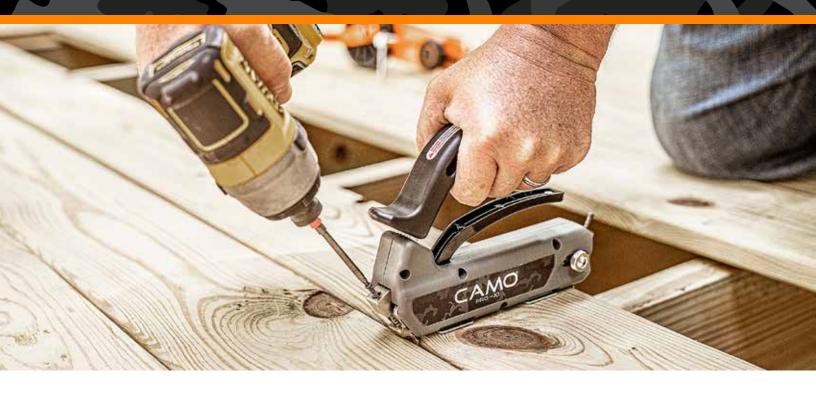

MARKSMAN[®] SYSTEM

Achieve a fastener-free surface on square edge decking with this easy and affordable hidden fastening system.

MARKSMAN Tools automatically establish spacing between boards and direct CAMO Edge Screws into the edge of the board, leaving a smooth deck surface. Plus, the MARKSMAN System is backed by a CAMO warranty for use in leading deck boards.



HIDDEN FASTENER SYSTEM





MARKSMAN PRO®

- For use with CAMO Edge Screws on square edge composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT deck boards
- Fits most 5-1/4 in (133 mm) to 5-3/4 in (146 mm) boards
- Creates 3/16 in (4.7 mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER
0345001	MARKSMAN Pro	1	6



MARKSMAN PRO°-X1

- For use with CAMO Edge Screws on pressure treated deck boards
- Fits most 5-1/4 in (133 mm) to 5-3/4 in (146 mm) boards
- Creates 1/16 in (1.59 mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER
0345002	MARKSMAN Pro - X1	1	6



MARKSMAN PRO®-NB

- For use with CAMO Edge Screws on square edge composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT narrow deck boards
- \bullet Fits most 3-1/4 in (83 mm) to 5 in (127 mm) boards
- Creates 3/16 in (4.7 mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER
0345015	MARKSMAN Pro - NB	1	6



MARKSMAN® EDGE

- \bullet For use with CAMO Edge Screws on pressure treated deck boards
- Single-shot tool attaches to your drill
- Tool leaves no spacing between boards



SKU#	DESCRIPTION	QTY	CT./MASTER
0345020	MARKSMAN Edge	1	3


CAMO



EDGE SCREWS

The Best Deck Screws You'll Never See.

CAMO Edge Screws are an innovative, easy-to-install hidden fastener that delivers a high-end look at an affordable price. They are for exclusive use with MARKSMAN PRO® tools. Edge Screws feature a patented rake tip that augers material out as you drive to reduce board splitting and a trimhead to reduce visibility. They are available in CAMO's proprietary PROTECH coating and 316 Stainless Steel.





PROTECH[®] COATED

PROTECH is our coating that is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements.



316 STAINLESS STEEL MARINE GRADE

316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas like structures that are near saltwater, or that will be exposed to harsh chemicals like chlorine, wood strippers, or ice melt.

DECK BOARD MATERIAL	RECOMMENDED CAMO EDGE SCREW
Pressure Treated Lumber	Stainless Steel or PROTECH Coated
Composite	Stainless Steel or PROTECH Coated
Capped Composite	Stainless Steel or PROTECH Coated (with partial pre-drill method)
PVC	Stainless Steel Required
Cedar	Stainless Steel Required
Redwood	Stainless Steel Required
Hardwood or Imported Hardwood	Stainless Steel Required (with partial pre-drill method)

EDGE SCREWS

- For use with all square edge deck boards, including pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Features a patented rake tip that augers material out as they're driven, reducing the potential for splitting and cracking*
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

*Pre-drilling is required for hardwoods and capped composites

- Trimhead reduces visibility on the edge of the board
- Available in PROTECH coating and 316 Stainless Steel





PROTECH' COATED



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345120		100	30 sq ft (2.79 m²)		12
0345128	1-% in (47.6 mm) x #7	350	100 sq ft (9.29 m ²)	1 - T-15	12
0345124		700	200 sq ft (18.58 m ²)	2 - T-15	4
0345119		1750	500 sq ft (46.45 m ²)	2 - T-15	4
0345140		100	30 sq ft (2.79 m²)		12
0345148	2 3/ :- /60 7 \ #7	350	100 sq ft (9.29m²)	1 - T-15	12
0345144	2-3% in (60.3 mm) x #7	700	200 sq ft (18.58 m²)	2 - T-15	4
0345139		1750	500 sq ft (46.45 m²)	2 - T-15	4

316 STAINLESS STEEL MARINE GRADE





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345220S		100	30 sq ft (2.79 m²)		12
0345228S	1-% in (47.6 mm) x #7	350	100 sq ft (9.29 m²)	1 - T-15	12
0345224S		700	200 sq ft (18.58 m ²)	2 - T-15	4
0345219S		1750	500 sq ft (46.45 m ²)	2 - T-15	1
0345240S		100	30 sq ft (2.79 m²)		12
0345248S	2.3/ := /60.7 ===> #7	350	100 sq ft (9.29 m²)	1 - T-15	12
0345244\$	2-3/4 in (60.3 mm) x #7	700	200 sq ft (18.58 m²)	2 - T-15	4
0345239S		1750	500 sq ft (46.45 m ²)	2 - T-15	1



MARKSMAN® ACCESSORIES

Driver Bits are engineered specifically for use with CAMO Edge Screws and MARKSMAN Pro* tools. The built-in shoulder sets automatic depth of drive for maximum holding power, and prevents over-driving the screw.

DRIVER BITSSQUARE BOARDS



- For use with MARKSMAN Pro® tools and Edge Screws
- 3 in (76.2 mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0345099	Driver Bit	2/pk	10

DRIVER BITSGROOVED BOARDS



- For use with MARKSMAN Pro® tools and Edge Screws
- 3 in (76.2 mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0345089	Driver Bit for Grooved Board	2/pk	10

PRE-DRILL BITS



- For use with MARKSMAN Pro® tools
- Pre-drilling is required for capped composite and hardwood
- 3-% in (92 mm) long



SKU#	DESCRIPTION	QTY	CT./MASTER
0345035	Pre-Drill Bit	2/pk	10



CAMO





CAMO BLOCK®

THE BETTER FLOATING FOUNDATION




Build a better freestanding deck from the ground up. If you're building a freestanding deck $5\frac{1}{2}$ in to 30 intall, there's no better solution than CAMO BLOCK[®].




- Lightweight 18x lighter than cement footings each BLOCK only weighs 2.16lb.
- Load rated to support 1800 lb, making them stronger than cement footings
- Made from recycled material and can be recycled when it's at the end of its life
- Comes with a 30-year warranty, will not chip, crack, or corrode, and is vented to prevent water build-up, rot, and mold.
- Easy to install and transport



SKU#	DESCRIPTION	WEIGHT	LOAD	QTY	CT./MASTER
0420001	BLOCK	2.16 lb	1800 lb	1	20

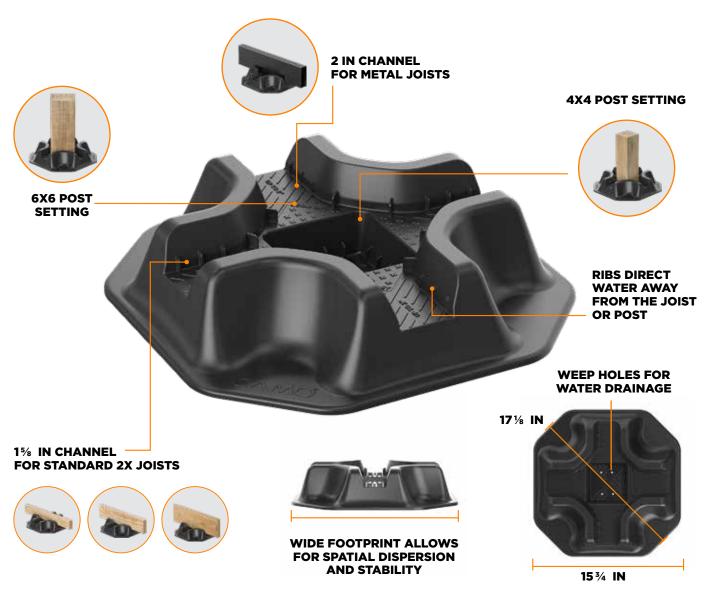

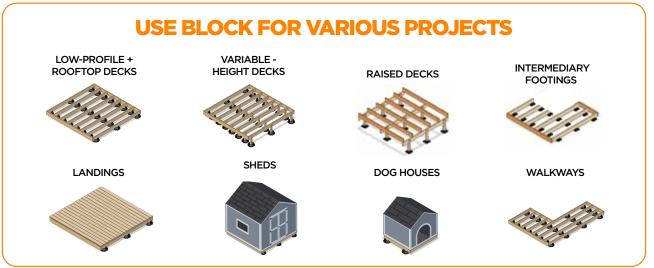





JOIST + LEDGER DECK TAPE

SELF-ADHESIVE LINED BUTYL TAPE

Protect and extend the life of your deck with CAMO Joist + Ledger Deck tape, made in the USA.







- Self Adhesive butyl tape creates a waterproof membrane to protect wood deck framing
- Self seals around fasteners, blocking the pathway of water into wood
- Extends the life of your deck
- · Securely bonds to wood framing
- One roll covers approximately 75 square feet of deck framing.

SKU#	DESCRIPTION	LENGTH	QTY	CT./MASTER
0375010	1 % in Joist + Ledger Deck Tape	65 ft	1	16
0375030	3 % in Joist + Ledger Deck Tape	65 ft	1	8
0375060	6 in Joist + Ledger Deck Tape	65 ft	1	8













SIZE-SPECIFIC APPLICATIONS



1% in width
Fully covers tops
of 2x wood joists



3% in width

For use with

double joists



6 in width
Ideal for ledger
and rim joists





CAMO LEVER®

BOARD BENDING AND LOCKING TOOL

Build a better deck by yourself with LEVER, the one-turn tool that locks-in rows of boards and clips and straightens warped boards.







- Speeds up grooved deck installs—locks-in rows of boards and clips before fastening
- Strong enough to straighten any warped board
- Easily adjusts to wood and metal joists 1-1/2 to 3 in wide for jobsite versatility
- Multi-directional lever locks in one turn



SKU#	DESCRIPTION	QTY	CT./MASTER
0345070	LEVER	1	4





LOCKS BOARDS & CLIPS

Use 2-4 LEVER tools across the length of the deck for the best clip installation experience with consistent spacing.

BENDS WARPED BOARDS

One LEVER is strong enough to straighten out warped pressure treated and hardwood boards in one turn.



ANY JOIST MATERIAL

Works on wood and metal joists



ANY JOIST WIDTH

Adjusts to joists $1-\frac{1}{2}$ to 3 in wide



ANY BOARD TYPE

Straightens and locks any board at any angle

ONE TOOL FOR EVERY JOB





EXTERIOR FASTENERS

CAMO offers a high-quality line of exterior fasteners that deliver on reliability no matter the project.

CAMO fasteners start fast, hold strong, and create long-lasting connections. Our fasteners are coated with high-performance exterior-grade coatings, and can be used on interior projects as well. Our comprehensive line includes Deck, Composite, Trim, and code-compliant Structural screws along with a line of marine-grade Stainless Steel fasteners. Make CAMO your one-stop shop for all your performance screw needs.

RECOMMENDED APPLICATIONS FOR EACH SCREW TYPE									
DECK	COMPOSITE	TRIM	NAILS	CODE-COMPLIANT STRUCTURAL					
Wood decking projects Fences Any exterior wood-to-wood connection	Composite decking projectsPVC decking projects	Wood and PVC DeckingExterior trimDeck railsBalustersFences	Wood patios Wood decks Other exterior wood to wood connections in corrosive environments	• Truss • Multi-Ply • Multi-Ply + Ledger • Framing • Multi-Purpose					
(p. 29-30)	(p. 31-33)	(p. 34-37)	(p. 59-60)	(p. 38-45)					

CAMO Exterior Fasteners also for Interior use

STAINLESS STEEL

CAMO offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments.

305 STAINLESS STEEL

Great corrosion resistance for most inland exterior projects.

316SS MARINE GRADE

Best corrosion resistance for projects in highly corrosive environments.

DECK SCREWS

- For any wood-to-wood connection
- Type 17 slash point starts fast and reduces splitting
- Star Drive provides more points of contact, reducing cam-outs

 Available in green and tan PROTECH coating to blend into wood surfaces, and 305 Stainless Steel and 316 Stainless Steel for maximum corrosion resistance

PROTECH® COATED

Deck Screws









GREEN SKU#	TAN SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0341070	0356070	1 1/ :- (710) #0	100	30 sq ft (2.79 m ²)	1 - T-25	12
0341074	0356074	1-¼ in (31.8 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0341100	0356100		100	30 sq ft (2.79 m ²)	1 - T-25	12
0341104	0356104	1-5/8 in (41.3 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0341109	0356109		1750	500 sq ft (46.45m²)	2 - T-25	1
0341130	0356130		100	30 sq ft (2.79 m ²)	1 - T-25	12
0341134	0356134	2 in (50.8 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0341139	0356139		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0341150	0356150		100	30 sq ft (2.79 m ²)	1 - T-25	12
0341154	0356154	2-½ in (63.5 mm) x #9	350	100 sq ft (9.29 m²)	1 - T-25	4
0341159	0356159	, c	1750	500 sq ft (46.45 m ²)	2 - T-25	1
0341170	0356170		100	30 sq ft (2.79 m²)	1 - T-25	12
0341174	0356174	3 in (76.2 mm) x #9	350	100 sq ft (9.29m²)	1 - T-25	4
0341179	0356179		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0341190	0356190		50	15 sq ft (1.39 m²)	1 - T-25	12
0341194	0356194	3-½ in (88.9 mm) x #10	250	70 sq ft (6.5 m²)	1 - T-25	4
0341199	0356199		1350	385 sq ft (35.77 m²)	2 - T-25	1
0341200	0356200		50	15 sq ft (1.39 m²)	1 - T-25	12
0341204	0356204	4 in (101.6 mm) x #10	250	70 sq ft (6.5 m²)	1 - T-25	4
0341209	0356209		1350	385 sq ft (35.77 m²)	2 - T-25	1
0341220	0356220		30	9 sq ft (0.84 m²)	1 - T-25	10
0341224	0356224	5 in (127 mm) x #12	100	30 sq ft (2.79 m²)	1 - T-25	4
0341229	0356229		250	70 sq ft (6.5 m²)	1 - T-25	1
0341240	0356240		30	9 sq ft (0.84 m²)	1 - T-25	10
0341244	0356224	6 in (152.4 mm) x #12	100	30 sq ft (2.79 m²)	1 - T-25	4
0341249	0356249		250	70 sq ft (6.5 m²)	1 - T-25	1

For more information on coatings, go to pg. 64

COUNTERSINKING

Deck Screws



PROTECH® COATED **TAN**

NEW







- For a premium finish on wood deck boards and other wood-to-wood connections
- Type 17 slash point reduces splitting
- Countersinking head creates a clean, flush finish
- T-25 star drive reduces stripping
- Reverse upper threads provide strong hold down power

SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0376070		100	30 sq ft (2.79 m²)	1 - T-25	12
0376074	1-¼ in (31.8 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0376100		100	30 sq ft (2.79 m²)	1 - T-25	12
0376104	1-% in (41.3 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0376109		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0376130		100	30 sq ft (2.79 m²)	1 - T-25	12
0376134	2 in (50.8 mm) x #8	350	100 sq ft (9.29 m²)	1 - T-25	4
0376139		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0376150		100	30 sq ft (2.79 m²)	1 - T-25	12
0376154	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0376159		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0376170		100	30 sq ft (2.79 m²)	1 - T-25	12
0376174	3 in (76.2 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0376179		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0376190		50	15 sq ft (1.39 m²)	1 - T-25	12
0376194	3-½ in (88.9 mm) x #10	250	70 sq ft (6.5 m²)	1 - T-25	4
0376199		1350	385 sq ft (35.77 m²)	2 - T-25	1
0376200		50	15 sq ft (1.39 m²)	1 - T-25	12
0376204	4 in (101.6 mm) x #10	250	70 sq ft (6.5 m²)	1 - T-25	4
0376209		1350	385 sq ft (35.77 m²)	2 - T-25	1

305 STAINLESS STEEL

Deck Screws



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100		100	30 sq ft (2.79 m ²)	1 - T-25	12
0348104	1-% in (41.3 mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348109		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348130		100	30 sq ft (2.79 m²)	1 - T-25	12
0348134	2 in (50.8 mm) x #8	350	100 sq ft (9.29m²)	1 - T-25	4
0348139*		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348150		100	30 sq ft (2.79m²)	1 - T-25	12
0348154	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348159		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348170		100	30 sq ft (2.79 m ²)	1 - T-25	12
0348174	3 in (76.2 mm) x #10	350	100 sq ft (9.29m²)	1 - T-25	4
0348179		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348190		50	30 sq ft (2.79 m ²)	1 - T-25	12
0348194	3-½ in (88.9 mm) x #10	250	100 sq ft (9.29 m ²)	1 - T-25	4
0348199		1350	500 sq ft (46.45 m ²)	2 - T-25	1
0348200		50	30 sq ft (2.79 m²)	1 - T-25	12
0348204	4 in (101.6 mm) x #10	250	100 sq ft (9.29 m²)	1 - T-25	4
0348209		1350	500 sq ft (46.45 m ²)	2 - T-25	1

316 STAINLESS STEEL MARINE GRADE

Deck Screws





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100S	1.5/ in (41.7 mans) v #0	100	30 sq ft (2.79 m ²)	1 - T-25	12
0348104S	1-% in (41.3 mm) x #8	350	100 sq ft (9.29m²)	1 - T-25	4
0348130S		100	30 sq ft (2.79 m ²)	1 - T-25	12
0348134S	2 in (50.8 mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348139S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348150S		100	30 sq ft (2.79 m ²)	1 - T-25	12
0348154S	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348159S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348170S		100	30 sq ft (2.79 m ²)	1 - T-25	12
0348174S	3 in (76.2 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348179S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348190S		50	15 sq ft (1.39 m²)	1 - T-25	12
0348194S	3-½ in (88.9 mm) x #10	250	70 sq ft (6.5 m²)	1 - T-25	4
0348199S		1350	385 sq ft (35.77 m ²)	2 - T-25	1

For more information on coatings, go to pg. 64

COMPOSITE SCREWS

- Color-matched screws for composite and PVC decking projects
- Double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming

- Reverse thread at top increases pull-down power while cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in PROTECH coating and 316 Stainless Steel for maximum corrosion resistance



COLOR MATCHER

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

PROTECH® COATED

Composite Screws







SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0349250		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349254	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Brown
0349259		1750	500 sq ft (46.45 m²)	2 - T-20	1	
0349350		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349354	2-1/2 in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Cedar
0349359		1750	500 sq ft (46.45 m²)	2 - T-20	1	
0349050		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349054	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Dark Brown
0349059		1750	500 sq ft (46.45 m ²)	2 - T-20	1	经 国际基本

PROTECH® COATED

Composite Screws



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0349450		100	30 sq ft (2.79 m²)	1 - T-20	12	1 (1 (1)
0349454	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Gray
0349459		1750	500 sq ft (46.45 m ²)	2 - T-20	1	
						COLUMN TUNIN
0349550		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349554	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Redwood
0349559		1750	500 sq ft (46.45 m ²)	2 - T-20	1	
0349750		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349754	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Sand
0349759		1750	500 sq ft (46.45 m²)	2 - T-20	1	
0349950		100	30 sq ft (2.79 m²)	1 - T-20	12	
0349954	2-1/2 in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Stone Gray
0349959		1750	500 sq ft (46.45 m ²)	2 - T-20	1	
						OMESA ENORS BOTH STATES
0349150		100	30 sq ft (2.79 m ²)	1 - T-20	12	
0349154	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Tan Maria
0349159		1750	500 sq ft (46.45 m ²)	2 - T-20	1	
0349850		100	30 sq ft (2.79 m ²)	1 - T-20	12	
0349854	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Winchester Winchester
0349859		1750	500 sq ft (46.45 m²)	2 - T-20	1	
0349000G		100	30 sq ft (2.79 m²)	1 - T-20	12	(His St.
0349004G	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Dark Gray
0349009G		1750	500 sq ft (46.45 m ²)	2 - T-20	1	Calabian

316 STAINLESS STEEL MARINE GRADE

Composite Screws





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLO	R
0367158BS		350	100 sq ft (9.29 m ²)	1 - T-20	4	_	0
0367159BS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Brown	
							RESIDENCE DE LA COMPANION DE L
0367158CS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Cedar	
0367159CS		1750	500 sq ft (46.45 m ²)	2 - T-20	1		
0367158ES		350	100 sq ft (9.29 m²)	1 - T-20	4		
0367159ES	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Gray	
0367158DS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Dark	
0367159DS	2 /2 111 (0010 111111) // 1110	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Brown	
0367158NS		350	100 sq ft (9.29 m²)	1 - T-20	4		V 🗘 🕕
0367159NS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Stone Gray	
0307133143		1750	300 3q 1t (40.43 III)	2 120	·		E WINESON AN
0367158RS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Redwood	0
0367159RS	2-72 III (63.5 IIIIII) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Redwood	
070715000		750	100 (1,40,00 3)	1 700			ODD SERVICE OF THE SE
0367158SS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Sand	(1)
0367159SS		1750	500 sq ft (46.45 m ²)	2 - T-20	1		SH (DEEDA YOU')
0367158TS		350	100 sq ft (9.29 m²)	1 - T-20	4	_	12
0367159TS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Tan	9
							10393195094.03
0367158WS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Winchester	
0367159WS		1750	500 sq ft (46.45 m ²)	2 - T-20	1		
0367158GS		350	100 sq ft (9.29 m²)	1 - T-20	4		
0367159GS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Dark Gray	(8)
							IPONO SERVICE EST
0367158S	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Bright	
0367159S	,	1750	500 sq ft (46.45 m ²)	2 - T-20	1	J .	
0367158FS		350	100 sq ft (9.29 m²)	1 - T-20	4	Dooch	120000148
0367159FS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Beach Sand	
000, 1001 0		., 50	230 34 12 (40.40 111)	2 1 20	'		DEBUG PORCE I NEE
0367158HS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Beach	
0367159HS	2 /2 111 (03.3 11111) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Gray	
07671601/6		750	100 cg ft (0.20 m²)	1 7 20	4		High Street
0367168KS	2- ³ / ₄ in (70 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	1	Black	0
0367169KS		1750	500 sq ft (46.45 m ²)	2 - T-20	1		HILL THE LEAD

For more information on coatings, go to pg. 64

TRIM SCREWS

- For exterior deck, trim, and finish applications with wood and PVC
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear

 Available in green PROTECH coating to blend into wood surfaces, bright 305 and 316 Stainless Steel, and painted 316 Stainless Steel

PROTECH® COATED

Trim Screws







SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0346100	1.5/ in (41.7 mans) v. #7	100	1 - T-15	12	
0346104	1-% in (41.3 mm) x #7	350	1 - T-15	4	
0346130	2 :- (50 0) #7	100	1 - T-15	12	
0346134	2 in (50.8 mm) x #7	350	1 - T-15	4	
0346150		100	1 - T-15	12	
0346154	2-½ in (63.5 mm) x #7	350	1 - T-15	4	55
0346159		1750	1 - T-15	1	
0346170	7 :- (76 2) #7	100	1 - T-15	12	
0346174	3 in (76.2 mm) x #7	350	1 - T-15	4	
0346190	7 1/ :- (00 0) #0	100	1 - T-15	12	
0346194	3-½ in (88.9 mm) x #8	350	1 - T-15	4	

410 STAINLESS STEEL - BLACK

Trim Screws



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
3332140B	2.1/:- (41.7) #7	100	1 - T-15	12
3332144B	2-¼ in (41.3 mm) x #7	350	1 - T-15	4

305 STAINLESS STEEL

Trim Screws



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0350100	1.5/ in //1.7 mams) v/ #0	100	1 - T-15	12
0350104	1-% in (41.3 mm) x #8	350	1 - T-15	4
0350130	2 in (50.8 mm) x #8	100	1 - T-15	12
0350134	2 III (50.6 IIIII) X #6	350	1 - T-15	4
0350150	2.1/ in (67.5 mm) v #0	100	1 - T-15	12
0350154	2-½ in (63.5 mm) x #8	350	1 - T-15	4
0350170	7 in (76.2 mm) v #9	100	1 - T-15	12
0350174	3 in (76.2 mm) x #8	350	1 - T-15	4

316 STAINLESS STEEL MARINE GRADE

Trim Screws





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0350100S	1-% in (41.3 mm) x #8	100	1 - T-15	12	
0350104S		350	1 - T-15	4	
0350130S	2 in (50.8 mm) x #8	100	1 - T-15	12	
0350134S		350	1 - T-15	4	
0350150S	2-½ in (63.5 mm) x #8	100	1 - T-15	12	52
0350154S		350	1 - T-15	4	0
0350170S	3 in (76.2 mm) x #8	100	1 - T-15	12	
0350174S		350	1 - T-15	4	
0350190S	7 1/ in (99 0 mm) v #9	100	1 - T-15	12	
0350194S	3-½ in (88.9 mm) x #8	350	1 - T-15	4	

For more information on coatings, go to pg. 64

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws





COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COI	LOR
0353000ES	1.5/ :- / 41.7) #0	100	1 - T-15	12		
0353004ES	1-% in (41.3 mm) x #8	350	1 - T-15	4	C	12
0353050ES	2-½ in (63.5 mm) x #8	100	1 - T-15	12	Gray	200
0353054ES	2-72 III (63.5 IIIIII) X #6	350	1 - T-15	4		
0353000RS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004RS	1-78 III (41.5 IIIIII) X #6	350	1 - T-15	4	Redwood	22
0353050RS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	Redwood	1
0353054RS	2-72 111 (03.3 111111) X #6	350	1 - T-15	4		
0353000WS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004WS	1-78 III (41.5 IIIIII) X #0	350	1 - T-15	4	Winchester	22
0353050WS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	vvinchester	200
0353054WS	2-72 111 (03.3 111111) X #6	350	1 - T-15	4		
0353000NS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004NS	1-78 III (41.5 IIIIII) X #0	350	1 - T-15	4		
0353050NS		100	1 - T-15	12	Stone Gray	43.
0353054NS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353059NS			2 - T-15	1		
0353000GS	1-5% in (41.3 mm) x #8	100	1 - T-15	12		
0353004GS	1-78 III (41.3 IIIIII) X #0	350	1 - T-15	4	Dark Gray	23
0353050GS	2 1/ in (67 F mm) v #0	100	1 - T-15	12	Dark Gray	-
0353054GS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws





Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	CO	LOR		
0353000SS	15/:-/417 40	100	1 - T-15	12				
0353004SS	1-% in (41.3 mm) x #8	350	1 - T-15	4	Carad	200		
0353050SS	2 1/ in (67 Emms) v #0	100	1 - T-15	12	Sand	200		
0353054SS	2-½ in (63.5mm) x #8	350	1 - T-15	4				
0353000DS	1-5% in (41.3 mm) x #8	100	1 - T-15	12				
0353004DS	1-78 111 (41.3 11111) X #6	350	1 - T-15	4	Dark Brown	(55)		
0353050DS	2-½ in (63.5 mm) x #8	100	1 - T-15	12				
0353000CS	1-5% in (41.3 mm) x #8	100	1 - T-15	12				
0353004CS	1-78 111 (41.3 11111) X #6	350	1 - T-15	4	Cedar	200		
0353050CS	2.1/ in (C7.5 mm) v #0	100	1 - T-15	12	Cedar	-		
0353054CS	2-½ in (63.5 mm) x #8	350	1 - T-15	4				
0353100S	1-5% in (41.3 mm) x #8	100	1 - T-15	12				
0353104S	1-78 III (41.5 IIIIII) X #0	350	1 - T-15	4	White	73		
0353150S	2-½ in (63.5 mm) x #8	100	1 - T-15	12	vviiite	vviiite	vvnite	
0353154S	2-72 III (63.5 IIIIII) X #6	350	1 - T-15	4				
0353000BS	1-5% in (41.3 mm) x #8	100	1 - T-15	12				
0353004BS	1-78 III (41.5 IIIIII) X #0	350	1 - T-15	4	Brown			
0353050BS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	BIOWII	1		
0353054BS	2-72 III (63.5 IIIIII) X #6	350	1 - T-15	4				
0353000TS	1-5% in (41.3 mm) x #8	100	1 - T-15	12				
0353004TS	1 78 III (41.5 IIIIII) A #0	350	1 - T-15	4	Tan	28		
0353050TS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	lali	200		
0353054TS	2 /2 1 (03.3 1)	350	1 - T-15	4				

For more information on coatings, go to pg. 64







STRUCTURAL SCREWS


CAMO offers a full line of high-performing, code-compliant structural screws for all your deck and framing needs. They are engineered to start fast, drive smooth, and hold strong. No pre-drilling required. Features our industry-leading propriety coating* for superior corrosion resistance.

PROTECH PROTECH ULTRA4 305 SS HDG 316 SS EXTERIOR MARINE CAN BE USED FOR INTERIOR APPLICATIONS

See pg. 64 for more information



DESIGN FEATURES

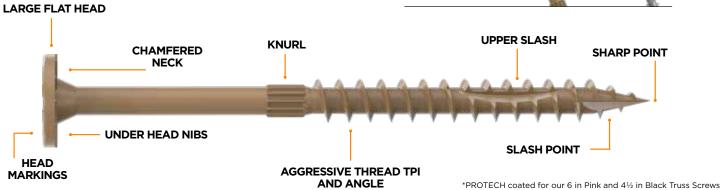

CODE COMPLIANT

Our structural screws have been third-party tested, audited, and certified as IBC and IRC code-compliant by Dr J Engineering

- Our line covers all popular interior and exterior structural applications
- Engineered to start fast, drive smooth, and hold strong - no pre-drilling required
- Rigorously tested and approved for use with pressure-treated lumber
- IRC and IBC code compliant, State of Florida FL 41741
- · Available in corrosion-resistant Hot Dip Galvanized, PROTECH® and PROTECH® Ultra 4 Coating

LEARN MORE ABOUT OUR STRUCTURAL SCREWS







CODE COMPLIANT APPLICATIONS









TRUSS

LEDGER

MULTI-PLY

FRAMING

GENERAL CONSTRUCTION APPLICATIONS













DECK BLOCKING

POSTS

STRUCTURES

LANDSCAPING

GENERAL CONSTRUCTION

RECOMMENDED APPLICATIONS

TRUSS

- Double top plate to truss or rafter
- Stud to double top plate
- · Bottom plate to rim board
- · Beams to joist

MULTI-PLY + LEDGER

- Multi-ply wood headers and beams
- Deck posts, beams, and handrails
- · Interior and exterior ledger boards
- · General construction projects

FRAMING

- Wood-to-wood framing connections
- Deck blocking
- Interior and exterior projects



- Garden and landscaping projects
- Deck posts, beams, and handrails
- General construction projects

TRUSS SCREWS (GUIDE INCLUDED)





- Code listed per DrJ TER No. 2102-01 and 2102-03 and State of Florida FL 41741
- For truss and rafter to top plate, stud to top plate, and deck joist to beam connections
- Replaces hurricane ties
- Fully threaded for maximum holding power
- Cylinder head easily countersinks for flush studs

- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-30 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Includes easy-to-use truss screw guide
- CAMO® PROTECH® and PROTECH® ULTRA 4 coating
- · For interior and exterior use



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COLOR	
0372244	C in (152 4 mars) v 0.155 in (7.0 mars)	50	1 - T-30	4	Ton	and the same of th
0372249	6 in (152.4 mm) x 0.155 in (3.9 mm)	500	1 - T-30	1	Tan	4
0372544*	C in (152.4 maps) v 0.155 in (7.0 maps)	50	1 - T-30	4	Dink	Alta .
0372549*	6 in (152.4 mm) x 0.155 in (3.9 mm)	500	1 - T-30	1	Pink	4



- Code listed per DrJ TER No. 2102-01 and 2102-03 and State of Florida FL 41741
- For stud to bottom plate connections over masonry or concrete, and sole plate to rim board connections.
- Fully threaded for maximum holding power
- Cylinder head easily countersinks for flush studs
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-30 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® coating
- For interior and exterior use

SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COL	OR	
0372724	41/ in (114.7 mm) v 0.155 in (7.0 mm)	50	1 - T-30	12	Disale		
0372729	4½ in (114.3 mm) x 0.155 in (3.9 mm)	500	1 - T-30	1	Black		NEW

*Hi-Vis Truss Screws are PROTECH coated

TRUSS GUIDE

Fasten at the right angle every time with our hands-free truss guide, included in every pail.



DOUBLE TOP PLATE TO TRUSS



DOUBLE TOP PLATE TO TRUSS



BEAM TO TRUSS



BEAM TO JOIST



STUD TO DOUBLE TOP PLATE



BOTTOM PLATE TO RIM BOARD



For the Black Truss Screw

FRAMING SCREWS



- Code listed per DrJ TER No. 2102-01 and State of Florida FL 41741
- For wood-to-wood framing connections, deck blocking, interior and exterior projects
- Replaces 8d, 10d, and 16d nails in interior and exterior framing applications
- Straight knurl reduces driving torque
- 6 nibs underhead help countersink screw

- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® ULTRA 4 coating



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0355150		50	1 - T-25	12
0355154	2-½ in (63.5 mm) x 0.160 in (4.06 mm)	150	1 - T-25	4
0355159		1000	2 - T-25	1
0355170		50	1 - T-25	12
0355174	3 in (76.2 mm) x 0.160 in (4.06 mm)	150	1 - T-25	4
0355179		1000	2 - T-25	1

5/16 In LEDGER + MULTI-PLY SCREWS



- Code listed per DrJ TER No. 2102-01, 2102-02, 2102-04, 2404-04 and State of Florida FL 41741
- Replaces nailing patterns that do not always draw the wood together and 1/2 in lag screws in general construction projects
- Straight knurl reduces driving torque
- · Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-40 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® ULTRA 4 coating
- Interior and exterior use



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	APPLICATION
0366180		10	1 - T-40	8	
0366184	2-% in (73 mm) x 5/16 in (7.9 mm)	50	1 - T-40	4	Multi-Ply
0366189		250	2 - T-40	1	
0366190		10	1 - T-40	8	
0366194	3-½ in (88.9 mm) x 5/16 in (7.9 mm)	50	1 - T-40	4	Ledger + Multi-Ply
0366199		250	2 - T-40	1	
0366200		10	1 - T-40	8	
0366204	4 in (101.6 mm) x 5/16 in (7.9 mm)	50	1 - T-40	4	Ledger + Multi-Ply
0366209		250	2 - T-40	1	
0366210		10	1 - T-40	8	
0366214	4-½ in (114.3 mm) x 5/16 in (7.9 mm)	50	1 - T-40	4	Multi-Ply
0366219		250	2 - T-40	1	
0366220		10	1 - T-40	8	
0366224	5 in (127 mm) x 5/16 in (7.9mm)	50	1 - T-40	4	Ledger + Multi-Ply
0366229		250	2 - T-40	1	
0366240		10	1 - T-40	8	
0366244	6 in (152.4 mm) x 5/16 in (7.9 mm)	50	1 - T-40	2	Multi-Ply
0366249		250	2 - T-40	1	
0366250		10	1 - T-40	8	
0366254	6-3/4 in (171.5 mm) x 5/16 in (7.9 mm)	50	1 - T-40	2	Multi-Ply
0366259		250	2 - T-40	1	

5/16 in Flat Head Screws available in $8^{\prime\prime}$ and $10^{\prime\prime}$ lengths for Multi-Purpose applications - see p. 45

MULTI-PURPOSE FLAT HEAD SCREWS

- Code listed per DrJ TER No. 2102-01, 2404-04 and State of Florida FL 41741
- For deck posts, beams, and general construction projects
- Replaces traditional lag screws and through-bolts
- Straight knurl reduces driving torque
- Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- · Slashes for reduced splitting
- Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO® PROTECH® 4 coating
- For interior and exterior use




5/16 In MULTI-PURPOSE FLAT HEAD SCREWS



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0366260		10	1 - T-40	10
0366264	8 in (203.2 mm) x 5/16 in (7.9 mm)	50	1 - T-40	2
0366269		250	2 - T-40	1
0366270		10	1 - T-40	8
0366274	10 in (254 mm) x 5/16 in (7.9 mm)	50	1 - T-40	2
0366279		250	2 - T-40	1

1/4 In MULTI-PURPOSE FLAT HEAD SCREWS



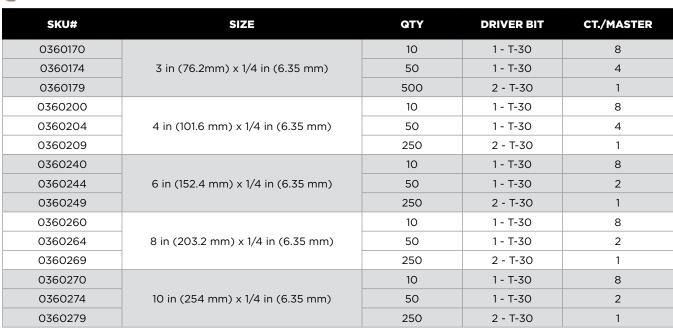

MULTI-PURPOSE HEX HEAD SCREWS

- Code listed per DrJ TER No. 2102-01 and State of Florida FL 41741
- For deck posts, beams, and general construction projects
- Slashes for reduced splitting
- Sharp point starts fast with no pre-drilling, reducing drive time
- Hex head with washer locks into a hex driver
- Straight knurl reduces driving torque
- Replaces lag screws
- Available in Hot-Dip Galvanized and CAMO® PROTECH® ULTRA 4 coating

PROTECH ULTRA 4

5/16 in HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0365260		10	7/16 in Hex	8
0365264	8 in (203.2 mm) x 5/16 in (7.9mm)	50	7/16 in Hex	2
0365269		250	7/16 in Hex	1
0365270		10	7/16 in Hex	8
0365274	10 in (254 mm) x 5/16 in (7.9 mm)	50	7/16 in Hex	2
0365279		250	7/16 in Hex	1
0365280	10: (70.10	10	7/16 in Hex	6
0365284	12 in (304.8 mm) x 5/16 in (7.9 mm)	50	7/16 in Hex	2

PROTECH ULTRA 4

1/4 in MULTI-PURPOSE HEX HEAD SCREWS





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0364090	1-½ in (38.1 mm) x 1/4 in (6.35 mm)	25	3/8 in Hex	8
0364094	1-72 III (30.1 HIIII) X 1/4 III (6.33 HIIII)	250	3/8 in Hex	4
0364170		10	3/8 in Hex	8
0364174	3 in (76.2 mm) x 1/4 in (6.35 mm)	50	3/8 in Hex	4
0364179		500	3/8 in Hex	1
0364200		10	3/8 in Hex	8
0364204	4 in (101.6 mm) x 1/4 in (6.35 mm)	50	3/8 in Hex	4
0364209		250	3/8 in Hex	1
0364240		10	3/8 in Hex	8
0364244	6 in (152.4 mm) x 1/4 in (6.35 mm)	50	3/8 in Hex	2
0364249		250	3/8 in Hex	1

HOT-DIP GALVANIZED

5/16 in HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0369260		10	7/16 in Hex	8
0369264	8 in (203.2 mm) x 5/16 in (7.9 mm)	50	7/16 in Hex	2
0369269		250	7/16 in Hex	1
0369270		10	7/16 in Hex	8
0369274	10 in (254 mm) x 5/16 in (7.9 mm)	50	7/16 in Hex	2
0369279		250	7/16 in Hex	1

HOT-DIP GALVANIZED

1/4 in MULTI-PURPOSE HEX HEAD SCREWS





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0368200		10	3/8 in Hex	8
0368204	4 in (101.6 mm) x 1/4 in (6.35 mm)	50	3/8 in Hex	4
0368209		250	3/8 in Hex	1
0368240		10	3/8 in Hex	8
0368244	6 in (152.4 mm) x 1/4 in (6.35 mm)	50	3/8 in Hex	4
0368249		250	3/8 in Hex	1

EXTERIOR ACCESSORIES

POWER BITS



T-40

- Power bits come in each pail of exterior screws for convenience on the jobsite
- 2 in (50.8 mm) long
- Premium Star Drive power bit allows for better connections









SKU#	DESCRIPTION	QTY	CT./MASTER
0333900	T-15 Star Drive Power Bit	3	10
0333910	T-20 Star Drive Power Bit	3	10
0333920	T-25 Star Drive Power Bit	3	10
0333990	T-30 Star Drive Power Bit	3	10
0333930	T-40 Star Drive Power Bit	3	10





STAINLESS STEEL FASTENERS

CAMO® offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments. Our 305 Stainless Steel screws deliver an aesthetic finish and hold up in your connections, while 316 Marine Grade Stainless Steel fasteners offer ultimate protection against corrosion in coastal and agricultural environments.

CORROSION RESISTANCE METER

While our PROTECH coating offers good resistance against mild corrosion, 305 and 316 Stainless Steel* are the best alloys to build with in corrosive areas.

PROTECH' ULTRA4 305 SS HDG 316 SS EXTERIOR MARINE ***

See p. 64 for more information

CAN BE USED FOR INTERIOR APPLICATIONS

305 STAINLESS STEEL

- Exterior structures outside of 3,000 ft. from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

316 STAINLESS STEEL

- Coastal, marine, or waterway areas within 3.000 ft of saltwater
- Structures exposed to chlorine, wood strippers, or ice-melting chemicals
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining

^{*} Stainless steel is not corrosion-proof; it is corrosion-resistant.and staining can still occur. It is important to regularly wash the installed screws to keep the heads and screw recesses clean from salt deposits and other residue.

RECOMMENDED APPLICATIONS FOR EACH FASTENER:

DECK

- Wood decking projects
- Fences

Deck rails


Any exterior wood-to-wood connection















UNIVERSAL DECK CLIPS

WEDGECLIP™





- Use with grooved composite, PVC and hardwood boards
- Clip body creates 3/16 in (4.7 mm) spacing
- Gusset holds boards down
- 316 stainless gusset, 316 stainless screw, nylon plastic spacer body
- Fasten with included NEVER-MISS® Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE.







DECK SCREWS

- For fastening wood decking and other wood-to-wood connections in corrosive environments
- Type 17 slash point starts fast with no pre-drilling, reducing drive time
- Buglehead draws board tight, increasing pull-down strength
- 2/3 thread design offers premium holding power
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in 305 Stainless Steel and 316 Stainless Steel

305 STAINLESS STEEL

Buglehead Deck Screws



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100		100	30 sq ft (2.79 m²)	1 - T-25	12
0348104	1-% in (41.3mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348109		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348130		100	30 sq ft (2.79 m²)	1 - T-25	12
0348134	2 in (50.8mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348139		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348150		100	30 sq ft (2.79 m²)	1 - T-25	12
0348154	2-½ in (63.5mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348159		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348170		100	30 sq ft (2.79 m²)	1 - T-25	12
0348174	3 in (76.2mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348179		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348190		50	30 sq ft (2.79 m²)	1 - T-25	12
0348194	3-½ in (88.9mm) x #10	250	100 sq ft (9.29 m ²)	1 - T-25	4
0348199		1350	500 sq ft (46.45 m ²)	2 - T-25	1
0348200		50	30 sq ft (2.79 m²)	1 - T-25	12
0348204	4 in (101.6mm) x #10	250	100 sq ft (9.29 m ²)	1 - T-25	4
0348209		1350	500 sq ft (46.45 m ²)	2 - T-25	1

316 STAINLESS STEEL MARINE GRADE

Buglehead Deck Screws





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100S	1.5/ in (41.7 mans) v. #0	100	30 sq ft (2.79 m²)	1 - T-25	12
0348104S	1-% in (41.3 mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348130S		100	30 sq ft (2.79 m²)	1 - T-25	12
0348134S	2 in (50.8 mm) x #8	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348139S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348150S		100	30 sq ft (2.79 m²)	1 - T-25	12
0348154S	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348159S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348170S		100	30 sq ft (2.79 m²)	1 - T-25	12
0348174S	3 in (76.2 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-25	4
0348179S		1750	500 sq ft (46.45 m ²)	2 - T-25	1
0348190S		50	30 sq ft (2.79 m²)	1 - T-25	12
0348194S	3-½ in (88.9 mm) x #10	250	100 sq ft (9.29 m²)	1 - T-25	4
0348199S		1350	500 sq ft (46.45 m ²)	2 - T-25	1

COMPOSITE SCREWS

- Color-matched screws for securing composite and PVC decking in highly corrosive environments
- Double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power
- Cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear



COLOR MATCHER

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

316 STAINLESS STEEL MARINE GRADE

Composite Screws





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0367158BS	2 1/ in (67 F mans) v #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Brown
0367159BS	2-½ in (63.5 mm) x #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Brown
0367158CS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Cedar
0367159CS	2-72 111 (63.5 11111) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Cedar
0367158ES	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Gray
0367159ES	2-72 111 (03.3 11111) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Gray
0367158DS	2 1/ in (67 Emm) v #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Dark
0367159DS	2-½ in (63.5mm) x #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Brown

SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0367158NS	0.1/:- (67.5) #10	350	100 sq ft (9.29 m²)	1 - T-20	4	Stone
0367159NS	2-½ in (63.5mm) x #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Gray
0367158RS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Redwood
0367159RS	2-72 III (63.5 IIIIII) X #10	1750	500 sq ft (46.45 m²)	2 - T-20	1	Redwood
0367158SS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Sand
0367159SS	2-72 111 (03.3 11111) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Sand
						COLUMN TO SERVICE SERV
0367158TS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Tan
0367159TS	2 72 111 (00.0 11111) X #10	1750	500 sq ft (46.45 m ²)	2 - T-20	1	Turi
						SASSIESSIE
0367158WS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Winchester
0367159WS	, , ,	1750	500 sq ft (46.45 m ²)	2 - T-20	1	
0367158GS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Dark Gray
0367159GS	, , ,	1750	500 sq ft (46.45 m ²)	2 - T-20	1	
						SPARSTROOM
0367158S	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Bright
0367159S	, , ,	1750	500 sq ft (46.45 m ²)	2 - T-20	1	
						DA BERAGESTA
0367158FS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Beach
0367159FS		1750	500 sq ft (46.45 m ²)	2 - T-20	1	Sand
						DEAL AREA WINNER
0367158HS	2-½ in (63.5 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Beach
0367159HS		1750	500 sq ft (46.45 m ²)	2 - T-20	1	Gray
0367168KS	2-¾ in (70 mm) x #10	350	100 sq ft (9.29 m ²)	1 - T-20	4	Black
0367169KS	, , ,	1750	500 sq ft (46.45 m ²)	2 - T-20	1	

305 STAINLESS STEEL

Bright Collated Face Screws for Composite

• For exclusive use with the CAMO® **DRIVE** Tool





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0395080	2-½ in (63.5 mm) x #10	1000	2 - T-20	1

EDGE SCREWS

- Fastens all square edge deck boards: pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Patented rake tip augers material out as they're driven, reducing the potential for splitting and cracking*

*Pre-drilling is required for hardwoods and capped composites

- Trimhead reduces visibility on the edge of the board
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

316 STAINLESS STEEL MARINE GRADE

Edge Screws

For exclusive use with CAMO[®] MARKSMAN PRO[®] Tools





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345220S		100	30 sq ft (2.79 m²)		12
0345228S	1.7/ in (47.6 mm) v #7	350	100 sq ft (9.29 m²)	1 - T-15	12
0345224S	1-1/8 in (47.6 mm) x #7	700	200 sq ft (18.58 m²)	2 - T-15	4
0345219S		1750	500 sq ft (46.45 m²)	2 - T-15	1
0345240S		100	30 sq ft (2.79 m²)		12
0345248S	2.3/ in (CO.7 mams) v #7	350	100 sq ft (9.29 m²)	1 - T-15	12
0345244S	2-3/8 in (60.3 mm) x #7	700	200 sq ft (18.58 m²)	2 - T-15	4
0345239S		1750	500 sq ft (46.45 m²)	2 - T-15	1

316 STAINLESS STEEL MARINE GRADE

Collated Edge Screws

• For exclusive use with the CAMO® **DRIVE**® Tool







SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0395020S	2-3% in (60.3 mm) x #7	1000	285 sq ft (26.5 m²)	2 - T-15	1

TRIM SCREWS

- For fastening wood and PVC deck trim and finish applications in corrosive environments
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in Bright 305 Stainless Steel, Bright 316 Stainless Steel, and Painted 316 Stainless Steel

305 STAINLESS STEEL

Trim Screws



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0350100	1.5/ in (41.7 mans) v #0	100	1 - T-15	12
0350104	1-% in (41.3 mm) x #8	350	1 - T-15	4
0350130	2 in (50.0 mm) #0	100	1 - T-15	12
0350134	2 in (50.8 mm) x #8	350	1 - T-15	4
0350150	2.1/ in (67.5 mm) v #0	100	1 - T-15	12
0350154	2-½ in (63.5 mm) x #8	350	1 - T-15	4
0350170	7 :- (76.2) #0	100	1 - T-15	12
0350174	3 in (76.2 mm) x #8	350	1 - T-15	4

316 STAINLESS STEEL MARINE GRADE

Trim Screws





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0350100S	1.5/:/41.7	100	1 - T-15	12	
0350104S	1-% in (41.3 mm) x #8	350	1 - T-15	4	
0350130S	2 in (E0.0 mm) v #0	100	1 - T-15	12	
0350134S	2 in (50.8 mm) x #8	350	1 - T-15	4	
0350150S	2.1/ in (67.5 mams) v #0	100	1 - T-15	12	52
0350154S	2-½ in (63.5 mm) x #8	350	1 - T-15	4	200
0350170S	7 in (76.2 name) v #0	100	1 - T-15	12	
0350174S	3 in (76.2 mm) x #8	350	1 - T-15	4	
0350190S	7 1/2 in (99 0 mm) v #9	100	1 - T-15	12	
0350194S	3-½ in (88.9 mm) x #8	350	1 - T-15	4	

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws





COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COL	.OR
0353000ES		100	1 - T-15	12		
0353004ES	1-% in (41.3 mm) x #8	350	1 - T-15	4		
0353050ES	0.1/: (07.5	100	1 - T-15	12	Gray	52.
0353054ES	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353000RS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004RS	1-78 III (41.3 IIIIII) X #6	350	1 - T-15	4	Redwood	200
0353050RS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	Reawood	200
0353054RS	2-72 III (03.3 IIIIII) X #0	350	1 - T-15	4		
0353000WS	1-% in (41.3 mm) x #8	100	1 - T-15	12		(4)
0353004WS	1-78 III (41.3 IIIIII) X #6	350	1 - T-15	4		
0353050WS	2.1/ : (67.5) #0	100	1 - T-15	12	Winchester	
0353054WS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353000NS	1.5/ :- /41.7 #0	100	1 - T-15	12		
0353004NS	1-% in (41.3 mm) x #8	350	1 - T-15	4	GL G	20
0353050NS	0.1/:- (67.5) #0	100	1 - T-15	12	Stone Gray	200
0353054NS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353000GS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004GS	1778 III (41.3 IIIIII) X #8	350	1 - T-15	4	Dark Gray	200
0353050GS	2 1/ in (67 F mm) v #0	100	1 - T-15	12		(3)
0353054GS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws





COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COI	.OR
0353000SS	15/ '- /417 #0	100	1 - T-15	12		
0353004SS	1-% in (41.3 mm) x #8	350	1 - T-15	4	Const	200
0353050SS	2.1/ := (67.5 ====) #0	100	1 - T-15	12	Sand	20.
0353054SS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353000DS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004DS	1 78 111 (41.5 111111) X #0	350	1 - T-15	4	Dark Brown	100
0353050DS	2-14 in (67.5 mm) x #9	100	1 - T-15	12	Dark Blown	
0353054DS	2-½ in (63.5 mm) x #8	350	1 - T-15	4		
0353000CS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004CS	1 76 III (41.3 IIIIII) X #0	350	1 - T-15	4	Cedar	数.
0353050CS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	Cedai	
0353054CS	2-72 III (03.3 IIIIII) X #0	350	1 - T-15	4		
0353100S	1-5% in (41.3 mm) x #8	100	1 - T-15	12		15
0353104S	1 70 m (11.0 11.11) X 110	350	1 - T-15	4	White	
0353150S	2-½ in (63.5 mm) x #8	100	1 - T-15	12	VVIIIC	
0353154S	2 /2 111 (05.5 11111) X #0	350	1 - T-15	4		
0353000BS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004BS	1 70 HT (11.0 11111) X 7/0	350	1 - T-15	4	Brown	200
0353050BS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	BIOWII	1
0353054BS	2 /2 111 (05.5 11111) X #0	350	1 - T-15	4		
0353000TS	1-% in (41.3 mm) x #8	100	1 - T-15	12		
0353004TS	. 70 (3 11111) X 110	350	1 - T-15	4	Tan	23
0353050TS	2-½ in (63.5 mm) x #8	100	1 - T-15	12	Idii	1
0353054TS	2 /2 111 (00.0 11111) X #0	350	1 - T-15	4		

POWER BITS



- Power bits come in each pail of exterior screws for convenience on the jobsite.
- 2 in (50.8 mm) long
- Premium Star Drive power bit allows for better connections







SKU#	DESCRIPTION	QTY	CT./MASTER
0333900	T-15 Star Drive Power Bit	3	10
0333910	T-20 Star Drive Power Bit	3	10
0333920	T-25 Star Drive Power Bit	3	10

HAND DRIVE NAILS

316 STAINLESS STEEL MARINE GRADE

Ring Shank Deck Nails



- For fastening wood patios and decks and other exterior wood-to-wood connections in corrosive environments
- · Diamond point starts easily
- Ring shank offers superior holding power and withdrawal force
- Checkered flat head provides a large striking surface, reducing hammer slippage for easy drive connection



SKU#	SIZE	QTY	SHANK	CT./MASTER	
5246158S	2.1/ in (67.5 mm) v #0	1 lb	Ring	4	
5246155S	2-½ in (63.5 mm) x #8	5 lb	Ring	12	
5246178S		1 lb	Ring	12	
5246175S	3 in (76.2 mm) x #10	5 lb	Ring	4	
5246179S		25 lb	Ring	4	
5246188S	7.1/ '- (00.5) #10	1 lb	Ring	12	
5246185S	3-¼ in (82.5 mm) x #12	5 lb	Ring	4	
5246195S	7 1/ in (00 0 mm) v #16	5 lb	Ring	12	
5246199S	3-½ in (88.9 mm) x #16	25 lb	Ring	4	

316 STAINLESS STEEL MARINE GRADE

Joist Hanger Nails



- For installing joist hangers to wood framing in corrosive environments
- Diamond point starts easily
- Smooth shank is fast and easy to drive
- Short, heavy gauge provides superior holding power
- Flat head provides a large striking surface for easy drive connection




SKU#	SIZE	QTY	SHANK	CT./MASTER	
5096095S	1-½ in (38.1 mm) x #9	5 lb	Smooth	4	

COLLATED NAILS

316 STAINLESS STEEL MARINE GRADE

Collated Ring Shank Framing Nails (21° Plastic Strip)



- For general construction, framing, deck, and fence building in corrosive environments
- Ring shank offers superior holding power and withdrawal force
- Round head provides greater resistance to pull out
- 21° plastic strip fits most 20°-22° framing nailers



SKU#	SIZE	QTY	SHANK	
5710258S	2-3% in (60.3 mm) x .113	1000	Ring	
5710176S	3 in (76.2 mm) x .120	1000	Ring	
5710286S	3-¼ in (82.5 mm) x .120	1000	Ring	

316 STAINLESS STEEL MARINE GRADE

Collated Metal Hanger Nails (31° Paper Strip)



- For metal connectors, joist hangers, joist ties, and hurricane straps in corrosive environments
- · Smooth shank provides good holding power
- Round head provides greater resistance to pull out
- Metal hanger nail strip fits most 31° metal connector nailers




SKU#	SIZE	QTY	SHANK		
5606090S	1-½ in (38.1 mm) x .148	1000	Smooth		





WHAT CAMO FASTENERS ARE MADE OF



CAN BE USED FOR INTERIOR APPLICATIONS

Building a deck, framing a house, or tackling any exterior project with CAMO fasteners means **building better.** CAMO fasteners start **fast,** create **strong connections,** and **hold up to the elements** over time, thanks to their coating and alloys.

Learn more about each option below so **you can be confident** you've got the right fastener for your project and gain **peace of mind** knowing that they are all **backed by a CAMO Warranty.**

PROTECH®




PROTECH is our proprietary coating for our steel screws. It is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements. Our PROTECH-coated fasteners are guaranteed against rust and corrosion for the life of your project so long as they are installed following CAMO recommendations.


PROTECH-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

- Decks, patios, and structures in inland areas away from water
- Installations of pressure treated, PVC, composite, and capped composite boards
- Exterior projects in temperate climates that face typical weather events

PROTECH® ULTRA 4







PROTECH ULTRA 4-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

For interior and exterior projects where corrosion resistance is key

confident your connections will stand the test of time.

- Structural projects that utilize a larger screw with a greater surface area, coming in contact with more wood
- Installations with ground contact general use pressure-treated lumber

305 STAINLESS STEEL



If your project is outside of 3,000 feet from a saltwater shoreline, Stainless Steel fasteners are recommended, and CAMO 305 Stainless Steel fits the bill. 305 Stainless Steel offers better resistance against corrosion than a carbon coating and will keep your project safe and long-lasting while offering excellent aesthetics. Widely available across the country, 305 Stainless Steel is a great alloy option for installing pressure treated lumber, PVC, composite, and capped composite deck boards no matter where you are located.

305 STAINLESS STEEL IS GREAT FOR A VARIETY OF APPLICATIONS:

- Exterior structures 3000 feet to 10 miles from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- · Any outdoor project that you want to protect against potential corrosion

HOT-DIP GALVANIZED



FOR COASTAL APPLICATIONS

A small step under Stainless Steel in terms of corrosion protection, hot-dip galvanized coating is a viable and reliable option for various fasteners. The code-approved coating is tested to meet ASTM A153, Class D, and is approved for use in MCA ground contact pressure treated lumber.

The hot-dip galvanization process results in a thick coating that will wear over time but still offer excellent protection against corrosion for the lifetime of the exterior application. Additionally, the coating is applied uniformly, so your connections are completely protected.

HOT-DIP GALVANIZED COATING IS COMMONLY USED IN THE FOLLOWING APPLICATIONS:

- Exterior projects in temperate climates that you want to protect against the elements
- Structural projects that utilize larger screws with a greater surface area, coming in contact with more wood
- Coastal applications

316 STAINLESS STEEL





316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas, so your build remains structurally sound and aesthetically pleasing.

Saltwater environments present an opportunity for severe rust and corrosion, so 316 Stainless Steel is required in any coastal, marine, or waterway area within 3,000 feet of saltwater. We also recommend using 316 Stainless Steel in structures within a 10-mile reach of saltwater, which are susceptible to increased corrosion rates as saltwater is aerosolized.

316 STAINLESS STEEL IS RECOMMENDED IN A VARIETY OF APPLICATIONS BEYOND SALTWATER EXPOSURE:

- Structures near swimming pools where the surface will be exposed to chlorine
- · Agricultural environments that deal with chemicals, pesticides, and treatments
- Decks, patios, and structures that will face wood strippers or ice-melting chemicals
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining and streaking

Stainless steel is not corrosion-proof; it is corrosion-resistant.and staining can still occur. It is important to regularly wash the installed screws to keep the heads and screw recesses clean from salt deposits and other residue.



FIND THE	BOARD PROFILE	FASTE	NING ME	THOD	FASTENERS	
RIGHT CAMO ⁵ FASTENER BY STARTING WITH YOUR BOARDS	SQUARE EDGE GROOVED	EDGE	CLIP	FACE	COMPOSITE (Collated and Hand Drive) DECK (Hand Drive) First Board For Wood Joists UNIVERSAL DECK CLIPS WEDGE™ WEDGE™ WEDGE™ WEDGEMETAL Any Pattern Any Pattern METAL JOISTS	NEVER-MISS* Guide Included with 450 ct and 900 ct CAMO Clip
Pressure Treated Lumber (Wet)	SQUARE EDGE	EDGE	CLIP	FACE	Collated Edge Screws • PROTECH or 316 Stainless Steel Edge Screws • PROTECH or 316 Stainless Steel Collated Wood Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel Deck Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel	
Pressure Treated Lumber (KDAT)	SQUARE EDGE	EDGE	CLIP	FACE	Collated Edge Screws • PROTECH or 316 Stainless Steel Edge Screws • PROTECH or 316 Stainless Steel Collated Wood Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel Deck Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel	
Composite	GROOVED	EDGE	CLIP	FACE	STARTER Clips EDGE Clips WEDGE Clips • 316 Stainless Steel WEDGEMETAL Clips	•
(Uncapped)	SQUARE EDGE	EDGE	CLIP	FACE	Collated Edge Screws • PROTECH or 316 Stainless Steel Edge Screws • PROTECH or 316 Stainless Steel Collated Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel	
Composite	GROOVED	EDGE	CLIP	FACE	STARTER Clips EDGE Clips WEDGE Clips • 316 Stainless Steel WEDGEMETAL Clips	•
(capped)	SQUARE EDGE	EDGE	CLIP	FACE	Edge Screws • PROTECH or 316 Stainless Steel (Pre Drill required for this option.) Collated Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel	
	GROOVED	EDGE	CLIP	FACE	STARTER Clips EDGE Clips WEDGE Clips • 316 Stainless Steel WEDGEMETAL Clips	•
PVC	SQUARE EDGE	EDGE	CLIP	FACE	Collated Edge Screws • 316 Stainless Steel Edge Screws • 316 Stainless Steel Collated Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel Composite Screws • PROTECH, 305 Stainless Steel, 316 Stainless Steel	
Cedar & Redwood	SQUARE EDGE	EDGE	CLIP	FACE	Edge Screws • 316 Stainless Steel Collated Edge Screws • 316 Stainless Steel Deck Screws • 316 Stainless Steel	
	GROOVED	EDGE	CLIP	FACE	STARTER Clips EDGE Clips WEDGE Clips • 316 Stainless Steel WEDGEMETAL™ Clips	•
Hardwood	SQUARE EDGE	EDGE	CLIP	FACE	Edge Screws • 316 Stainless Steel (Pre Drill required for this option.)	
		EDGE	CLIP	FACE	Deck Screws • 316 Stainless Steel (Pre Drill required for this option.)	

FASTENER & TOOL SELECTOR

95										
				TOOLS						
CLPDRIVE	ClipDRIVE"*	Edge	DRIVE	Face	MARKSMAN PRO Edge 3/16 in Gap	MARKSMAN PRO'-XI Edge 1/16 in Gap	MARKSMAN PRO'-NB Edge 3/16 in Gap	MARKSMAN Edge Edge No Gap	LEVER Board Bending and Locking	
										P
		•				•		•	•	ı
				•					•	
_									•	
		•			•		•		•	
				•						
									•	
									•	
	•		•						•	
	•		•						•	
		•			•		•		•	
				•	•					ı
									•	
									•	_
	•		•						•	
	•		•						•	
					• 🔻		• 🕶		•	
										1
				•					•	
									•	
	•		•							
	•		•						•	_
		•							•	
				•	•		•		•	
									•	
		•			•		•		•	
		•							•	
									•	
									•	
	•		•						•	
	•		•						•	-
					• 🔻		• 🕶		•	
					•					
									•	



MICHIGAN

2964 Clydon Ave SW Grand Rapids, MI 49519

NEW YORK

5985 Tarbell Rd Syracuse, NY 13206

GEORGIA

555 Riverside Pkwy, Ste. 100 Austell, GA 30168

TEXAS

3701 Yale St Houston, TX 77018

CALIFORNIA

3765 Channel Drive West Sacramento, CA 95691

FOR MORE INFORMATION, PLEASE VISIT WWW.CAMOFASTENERS.COM OR CALL 800-968-6245 TO SPEAK WITH A CAMO PRODUCT EXPERT.